Vacuum-Air Relief Valve for either a 2” or 3” Clamp Connection

Features of the Vacuum-Air Relief Valve:

Accommodates either a 2” or 3” clamp connection

Maximum flow rate: 500 GPM

Pressure relief: 1 psi.

Vacuum break: 1 psi.

Dome helps in preventing external contamination

Alloy: T304 & Robust PVC

Vacuum-Air Relief Valve for either a 2” or 3” Clamp Connection

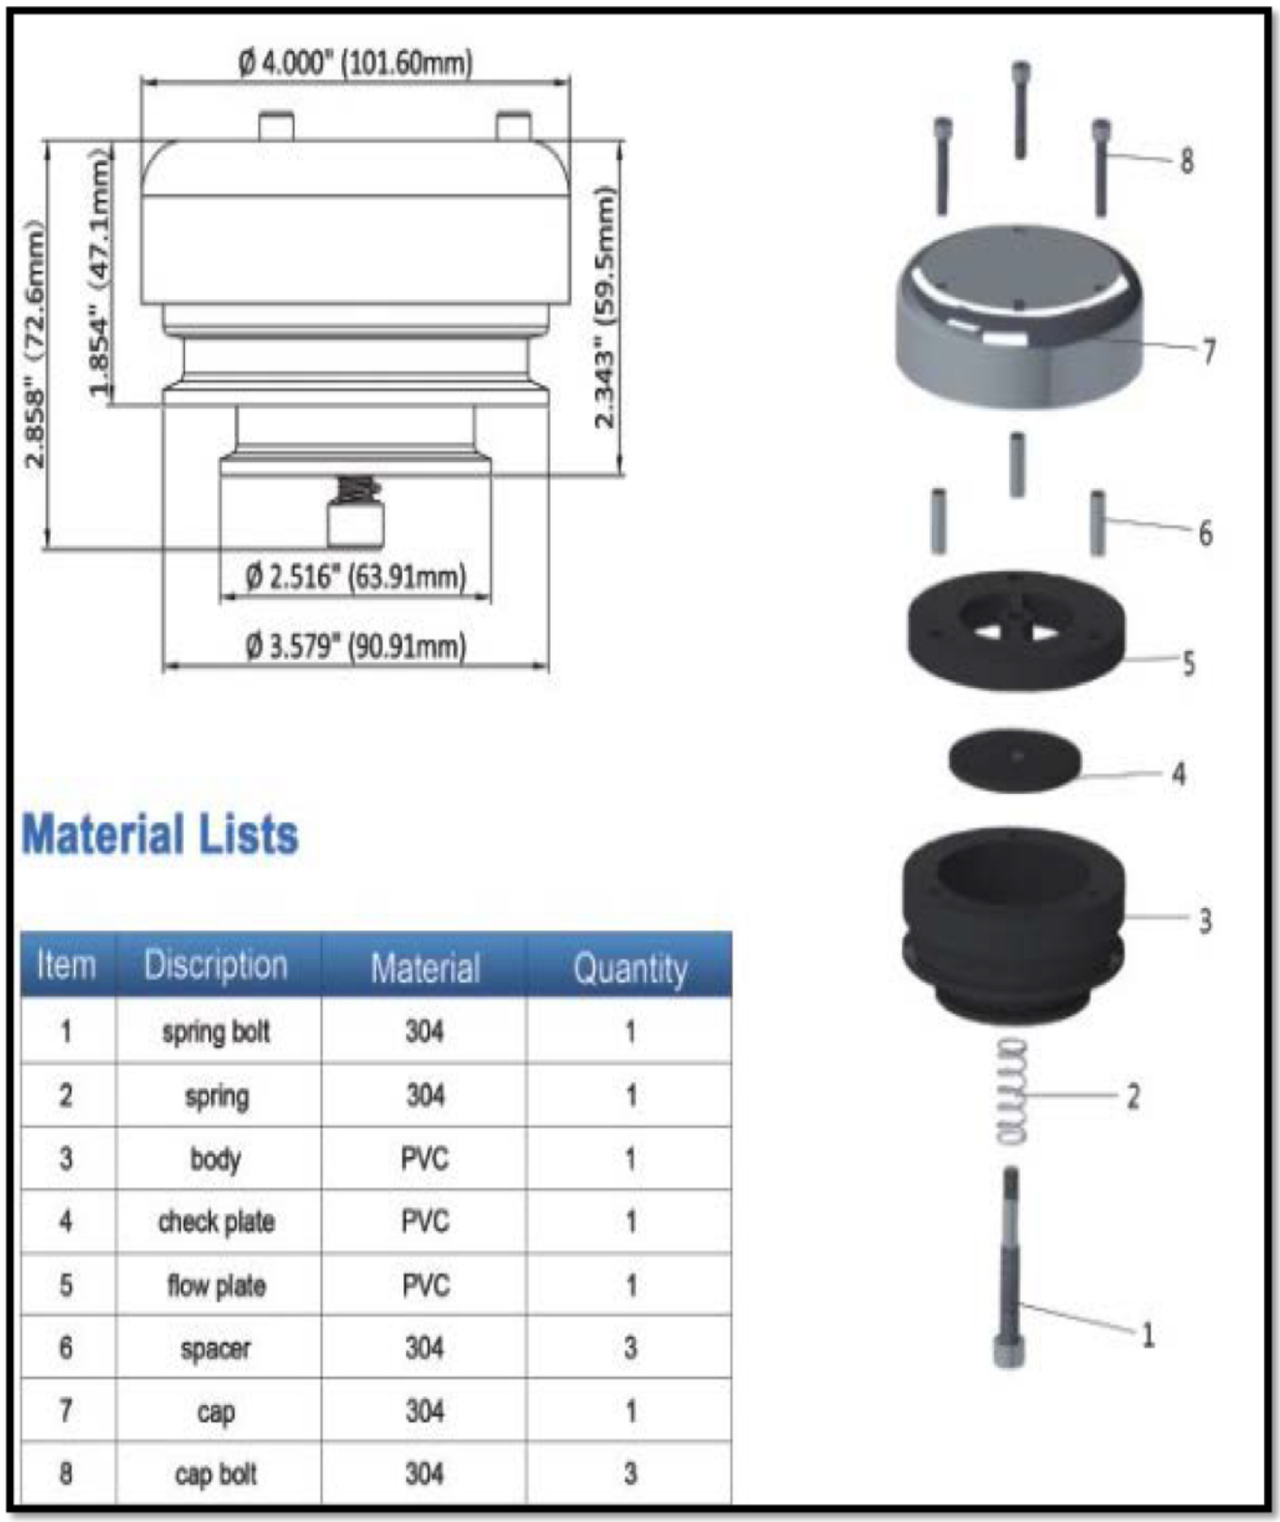

Material Lists

Item	Discription	Material	Quantity
1	spring bolt	304	1
2	spring	304	1
3	body	PVC	1
4	check plate	PVC	1
5	flow plate	PVC	1
6	spacer	304	3
7	cap	304	1
8	cap bolt	304	3

“Live” People Answering your call